




WSM-5061VA Metallic Wall Loudspeaker

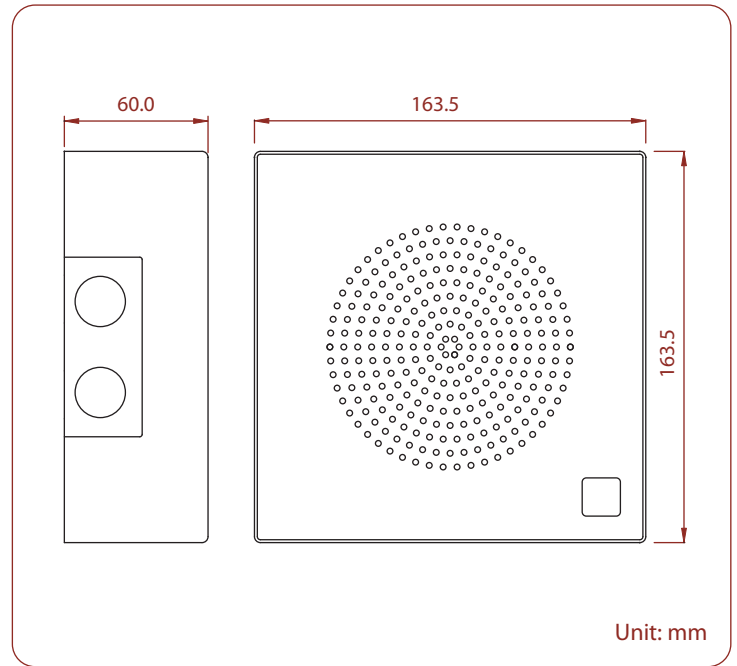

- 100 Hours Life Tested
- CE Certified (EMC & LVD)
- IP Rated
- Rustproof
- UL94V0
- BS 5839 Part 8 & EN 60849
- EASE Data
- RoHS Compliance
- UV Stable
- Withstanding/Insulation Tested

- EN 54-24 certified. CertificationNo. 1438-CPD-0256
- Compliant with British Standard BS 5839 part 8 and EN 60849
- Two cable entries to enable loop in loop out installation
- Vandal - proof
- Fitted with a 5" twin cone driver unit
- Designed to wide response for music & speech
- Finished in white (RAL 9010)



Model No.	WSM-5061VA
Rated Power (rms)	6W
Impedance	1.67kΩ, 3.33kΩ, 6.67kΩ & 13.33kΩ
Power Taps @ 100V	6W, 3W, 1.5W & 0.75W
Power Taps @ 70V	3W, 1.5W, 0.75W & 0.375W
SPL (1W / 1m) @1kHz	90dB
Max. SPL (Rated W / 1m) @1kHz	98dB
Frequency Range (-10dB)	190 Hz ~ 18kHz
Dispersion 1k Hz / 4k Hz	175° / 65°
Operating Temperature	-35°C ~ +70°C
Power Selection	Plug
Material	Housing: Steel
Colour / Finish	White (RAL 9010)
Dimensions	163.5 (6.44) X 163.5 (6.44) X 60.0 (2.36) mm. (in.)
Net Weight (ea)	2.00 kg (4.41 lb.)
Mounting	Screw

■ **Rated Power according to IEC 60268- 5 100 hours Power Handling Capacity standard**