




CAL-5300

Pro Audio Cabinet Loudspeaker

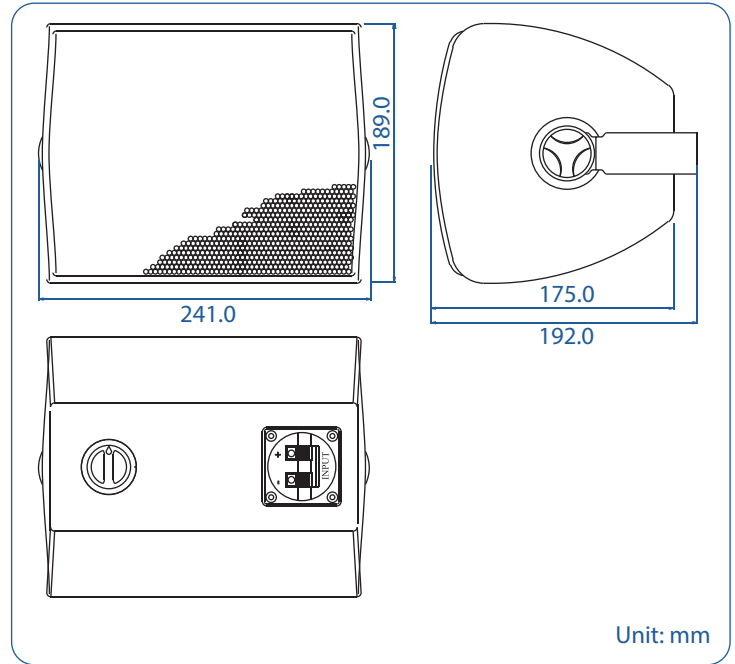

Unit: mm

- 100 Hours Life Tested
- CE Certified (EMC & LVD)
- IP Rated
- Rustproof
- UL94V0
- BS 5839 Part 8
- EASE Data
- RoHS Compliance
- UV Stable
- Withstanding/Insulation Tested

- Very high quality 2-way speaker system with 5" polypropylene bass / mid cone & 10-ounce magnet + mylar laminate dome tweeter
- Rotary power selector
- Bass reflex design
- Designed for the pro audio and commercial market
- Designed utilizing CES Audio's anechoic test facilities with state of the art digital system analysis for accurate cabinet specification
- Attractive trapezoid cabinet design for improved directivity and versatile mounting
- Made from acoustically matched high impact polystyrene
- Finished in black

| Model No. | CAL-5300 |
|--------------------------|--|
| Rated Power (rms) | 30W |
| Impedance | 167Ω, 333Ω, 667Ω, 1.30kΩ, 2.60kΩ & 8Ω |
| Power Taps @ 100V | 30W, 15W, 7.5W, 3.75W & 8Ω |
| Power Taps @ 70V | 30W, 15W, 7.5W, 3.75W, 1.9W & 8Ω |
| SPL (1W / 1m) | 89dB |
| Max. SPL (Rated W / 1m) | 104dB |
| Frequency Range (-10dB) | 75 Hz ~ 25k Hz |
| Dispersion 1k Hz / 4k Hz | 190° / 125° |
| Operating Temperature | -30°C ~ +60°C |
| Power Selection | Selecting switch |
| Termination | Push terminal |
| Material | Housing: High impact polystyrene, Grille: Steel |
| Colour / Finish | Black |
| Dimensions | 241.0 (9.49) W X 189.0 (7.44) H X 175.0 (6.89) D mm. (in.) |
| Net Weight (ea) | 2.66 kg (5.86 lb.) |
| Mounting | U Type steel bracket |