CAL-5300W
Pro Audio Cabinet Loudspeaker

189.0

241.0

175.0

192.0

Unit: mm
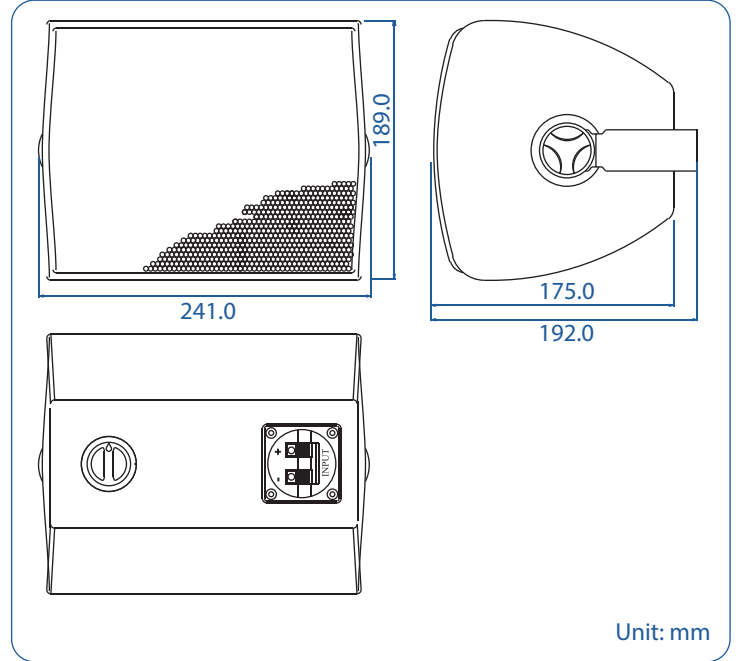
| ☑ 100 Hours Life Tested | ☑ CE Certified (EMC & LVD) | ☐ IP Rated | ☐ Rustproof | ☐ UL94V0 |
| ☐ BS 5839 Part 8 | ☑ EASE Data | ☑ RoHS Compliance | ☐ UV Stable | ☑ Withstanding/Insulation Tested |

➢ Very high quality 2-way speaker system with 5" polypropylene bass / mid cone & 10-ounce magnet + mylar laminate dome tweeter

➢ Rotary power selector

➢ Bass reflex design

➢ Designed for the pro audio and commercial market

➢ Designed utilizing CES Audio's anechoic test facilities with state of the art digital system analysis for accurate cabinet specification

➢ Attractive trapezoid cabinet design for improved directivity and versatile mounting

➢ Made from acoustically matched high impact polystyrene

➢ Finished in white

Model No.	CAL-5300W
Rated Power (rms)	30W
Impedance	167Ω, 333Ω, 667Ω, 1.30kΩ, 2.60kΩ & 8Ω
Power Taps @ 100V	30W, 15W, 7.5W, 3.75W & 8Ω
Power Taps @ 70V	30W, 15W, 7.5W, 3.75W, 1.9W & 8Ω
SPL (1W / 1m)	89dB
Max. SPL (Rated W / 1m)	104dB
Frequency Range (-10dB)	75 Hz ~ 25k Hz
Dispersion 1k Hz / 4k Hz	190˚ / 125˚
Operating Temperature	-30˚C ~ +60˚C
Power Selection	Selecting switch
Termination	Push terminal
Material	Housing: High impact polystyrene, Grille: Steel
Colour / Finish	White
Dimensions	241.0 (9.49) W X 189.0 (7.44) H X 175.0 (6.89) D mm. (in.)
Net Weight (ea)	2.66 kg (5.86 lb.)
Mounting	U Type steel bracket