




# CLS-3300 "Contractor Series" Column Loudspeaker

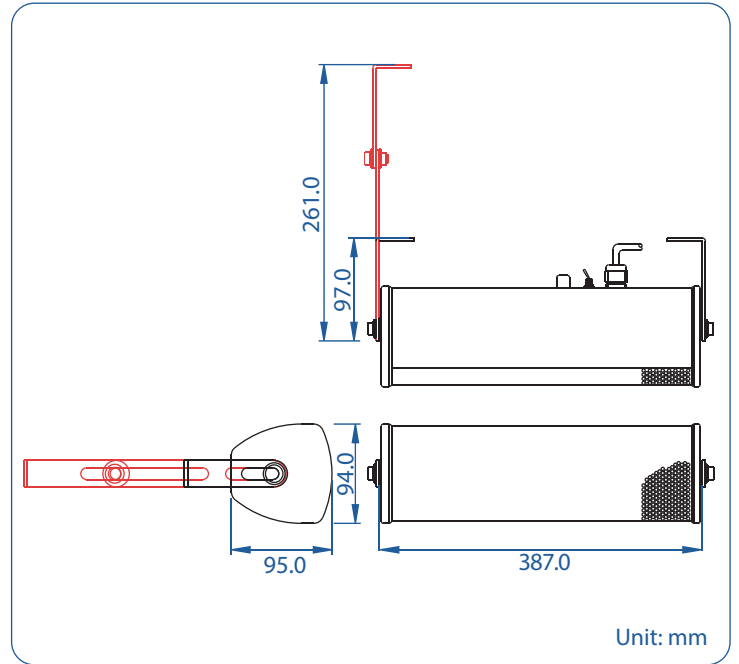

- 100 Hours Life Tested
- CE Certified (EMC & LVD)
- IP Rated
- Rustproof
- UL94V0
- BS 5839 Part 8
- EASE Data
- RoHS Compliance
- UV Stable
- Withstanding/Insulation Tested

- Rotary power selector
- Rear-mounted low-cut switch for speech
- Attractive slimline construction
- Fitted with high specification driver units / tweeter for exceptional speech & music reproduction
- Suitable for accurate, "long throw" applications
- Available in 30 watt
- Highly cost effective solution
- Durable galvanize steel housing
- Mounting bracket included
- Finished in white

Model No.	CLS-3300
Rated Power (rms)	30W
Number of Loudspeakers	3" Woofer X 3 + 2" Tweeter X 1
Impedance	167Ω, 333Ω, 667Ω, 1.33kΩ & 2.67kΩ
Power Taps @ 100V	30W, 15W, 7.5W & 3.75W
Power Taps @ 70V	30W, 15W, 7.5W, 3.75W & 1.9W
SPL (1W / 1m)	88dB
Max. SPL (Rated W / 1m)	103dB
Frequency Range (-10dB)	140 Hz ~ 20k Hz
Dispersion 1k Hz / 4k Hz	H: 195° / 105°, V: 105° / 30°
Operating Temperature	-30°C ~ +60°C
Low-cut Switch	400 Hz
Power Selection	Selecting switch
Material	Housing: Galvanized steel, Grille: Steel
Colour / Finish	White
Dimensions	387.0 (15.24) L X 94.0 (3.70) W X 95.0 (3.74) D mm. (in.)
Net Weight (ea)	2.30 kg (5.07 lb.)
Mounting	L Type steel bracket