




COS203040

Waterproof Column Loudspeaker

【 EN 54-24 】

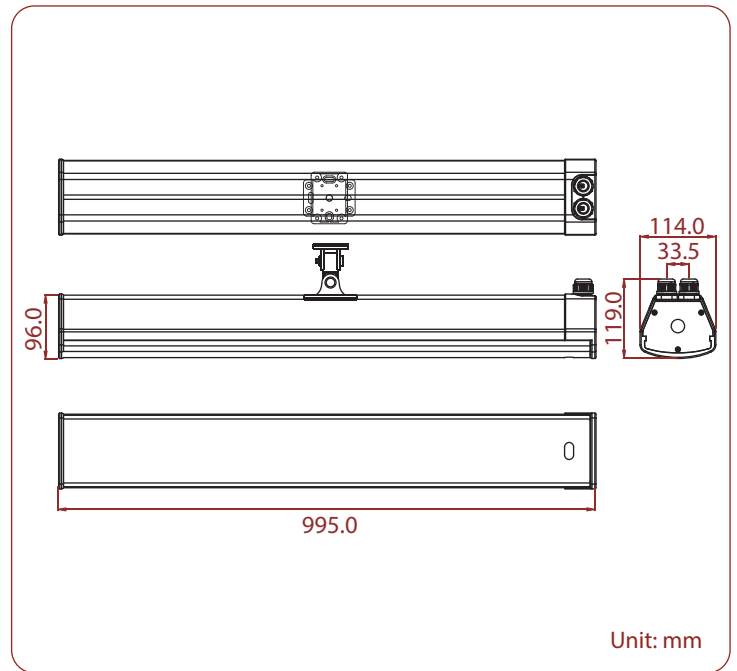

Unit: mm

- 100 Hours Life Tested
- CE Certified (EMC & LVD)
- IP Rated
- RoHS Compliance
- UL94V0
- BS 5839 Part 8 & EN 60849
- EASE Data
- Multi-Bracket Broken Tested
- Rustproof
- Withstanding/Insulation Tested

- Compliant with EN54-24
- Compliant with British Standard BS 5839 part 8 and EN 60849
- Rotary power selector
- Two cable entries to enable loop in loop out installation
- Ingress protected to IEC 60529 IP 66, suitable for indoor and outdoor use
- Durable extruded aluminium housing
- Durable aluminium alloy multi bracket broken tested up to 1500 kgf
- Finished in white

Model No.	COS203040
Rated Power (rms)	40W
Number of Loudspeakers	3.5" Woofer X 8 + 3.25" Tweeter X 1
Impedance	125Ω, 250Ω, 500Ω, 1kΩ & 2kΩ
Power Taps @ 100V	40W, 20W, 10W & 5W
Power Taps @ 70V	40W, 20W, 10W, 5W & 2.5W
SPL (1W / 1m)	93dB
Max. SPL (Rated W / 1m)	109dB
Frequency Range (-10dB)	140 Hz ~ 20k Hz
Dispersion 1k Hz / 4k Hz	H: 194° / 102°, V: 30° / 48°
Operating Temperature	-30°C ~ +70°C
Operating Temperature - EN54-24	-20°C ~ +70°C
Ingress Protection	IEC 60529 IP 66
Ingress Protection - EN54-24	IP 33C
Power Selection	Selecting Switch
Material	Housing: Extruded aluminium, Grille: Aluminium
Colour / Finish	White
Dimensions	995.0 (39.17) L X 114.0 (4.49) W X 96.0 (3.78) D mm. (in.)
Net Weight (ea)	7.30 kg (16.06 lb.)
Mounting	Aluminium alloy multi bracket