




CPC-6061EC

Clip-Mount Plastic Ceiling Loudspeaker

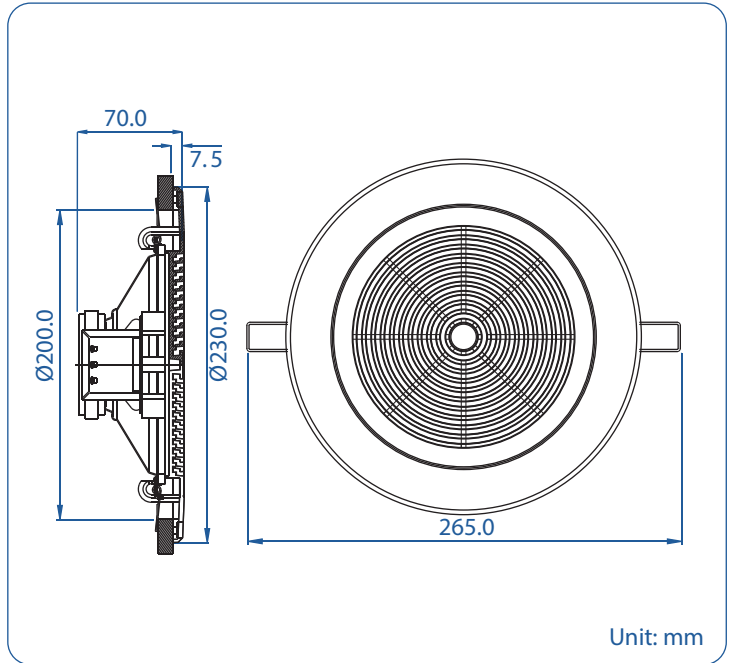

- 100 Hours Life Tested
- CE Certified (EMC & LVD)
- IP Rated
- Rustproof
- UL94V0
- BS 5839 Part 8
- EASE Data
- RoHS Compliance
- UV Stable
- Withstanding/Insulation Tested

- Low profile grille design
- Fast fitting and economical spring design
- Ideal for shallow ceiling voids
- Fitted with a twin cone driver unit
- Designed to offer a wide response for music & speech
- High impact ABS grille
- Finished in white

Model No.	CPC-6061EC
Rated Power (rms)	6W
Impedance	1.67kΩ, 3.33kΩ, & 6.67kΩ
Power Taps @ 100V	6W, 3W, & 1.5W
Power Taps @ 70V	3W, 1.5W, & 0.75W
SPL (1W / 1m)	93dB
Max. SPL (Rated W / 1m)	100dB
Frequency Range (-10dB)	100 Hz ~ 20k Hz
Dispersion 1k Hz / 4k Hz	120°/90°
Ambient Temperature	-30°C ~ +60°C
Power Selection	Plug
Material	Baffle: High impact ABS
Colour / Finish	White
Dimensions	230.0 (9.06) Dia. X 70.0 (2.76) Height mm. (in.)
Cutout Size	200.0 (7.87) Dia. mm. (in.)
Net Weight (ea)	0.85 kg (1.87 lb.)
Mounting	Spring-clip