




SCP-2060

IP Rated "Splashproof" Ceiling Loudspeaker

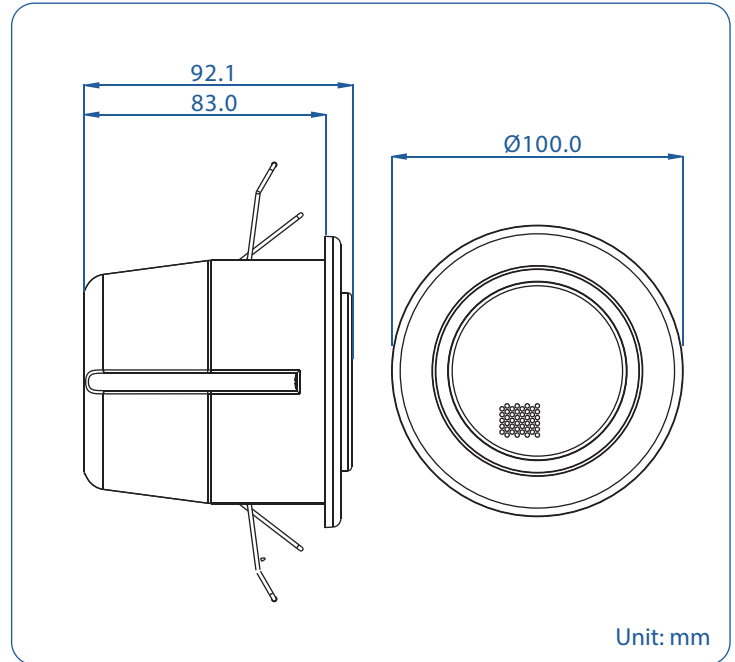

Unit: mm

- 100 Hours Life Tested
- CE Certified (EMC & LVD)
- IP Rated
- Rustproof
- UL94V0
- BS 5839 Part 8
- EASE Data
- RoHS Compliance
- UV Stable
- Withstanding/Insulation Tested

- **Ingress protected to IEC 529 IP 55**
- **Stainless steel mounting springs and exterior hardware**
- **Also suitable for food processing plants or applications where significant moisture is present such as bathroom or steam sauna rooms**
- Designed for unobtrusive installation. Same size and fixing mechanism as spotlights
- Suitable for non-shedding, "clean-room" environments
- 2.5" full range driver unit
- Remarkable sound quality from small unit
- Sealed ABS rear enclosure with glanded cable tail
- Finished in white

Model No.	SCP-2060
Rated Power (rms)	6W
Impedance	833Ω, 1.67kΩ, 3.33kΩ, 6.67kΩ & 8Ω
Power Taps @ 100V	6W, 3W & 8Ω
Power Taps @ 70V	6W, 3W, 1.5W & 8Ω
SPL (1W / 1m)	86dB
Max. SPL (Rated W / 1m)	94dB
Frequency Range (-10dB)	220 Hz ~ 20k Hz
Dispersion 1k Hz / 4k Hz	210° / 90°
Operating Temperature	-30°C ~ +60°C
Ingress Protection	IEC 529 IP 55
Power Selection	6-core cable
Material	Baffle: ABS, Grille: Aluminium, Enclosure: ABS
Colour / Finish	White
Dimensions	100.0 (3.94) Dia. X 92.1 (3.62) Height mm. (in.)
Cutout Size	92.0 (3.62) Dia. mm. (in.)
Net Weight (ea)	0.59 kg (1.31 lb.)
Mounting	Stainless steel spring