




SCP-4060

IP Rated "Splashproof" Ceiling Loudspeaker

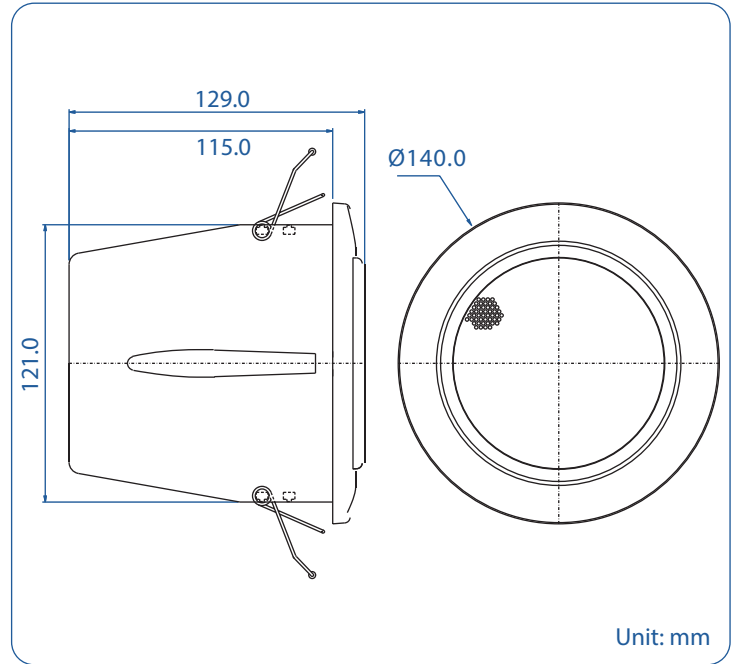

- 100 Hours Life Tested
- CE Certified (EMC & LVD)
- IP Rated
- Rustproof
- UL94V0
- BS 5839 Part 8
- EASE Data
- RoHS Compliance
- UV Stable
- Withstanding/Insulation Tested

- Ingress protected to IEC 529 IP 55
- Stainless steel mounting springs and exterior hardware
- Also suitable for food processing plants or applications where significant moisture is present such as bathroom or steam sauna rooms
- Suitable for non-shedding, "clean-room" environments
- Sealed ABS rear enclosure with glanded cable tail
- 4" full range polypropylene driver unit
- Finished in white

Model No.	SCP-4060
Rated Power (rms)	6W
Impedance	833Ω, 1.67kΩ, 3.33kΩ, 6.67kΩ & 8Ω
Power Taps @ 100V	6W, 3W & 8Ω
Power Taps @ 70V	6W, 3W, 1.5W & 8Ω
SPL (1W / 1m)	88dB
Max. SPL (Rated W / 1m)	95dB
Frequency Range (-10dB)	150 Hz ~ 20k Hz
Dispersion 1k Hz / 4k Hz	210° / 130°
Operating Temperature	-30°C ~ +60°C
Ingress Protection	IEC 529 IP 55
Power Selection	6-core cable
Material	Baffle: ABS, Grille: Aluminium, Enclosure: ABS
Colour / Finish	White
Dimensions	140.0 (5.51) Dia. X 129.0 (5.08) Height mm. (in.)
Cutout Size	125.0 (4.92) Dia. mm. (in.)
Net Weight (ea)	0.96 kg (2.12 lb.)
Mounting	Stainless steel spring