




# WSM-5061VA Metallic Wall Loudspeaker

【Voice Alarm】

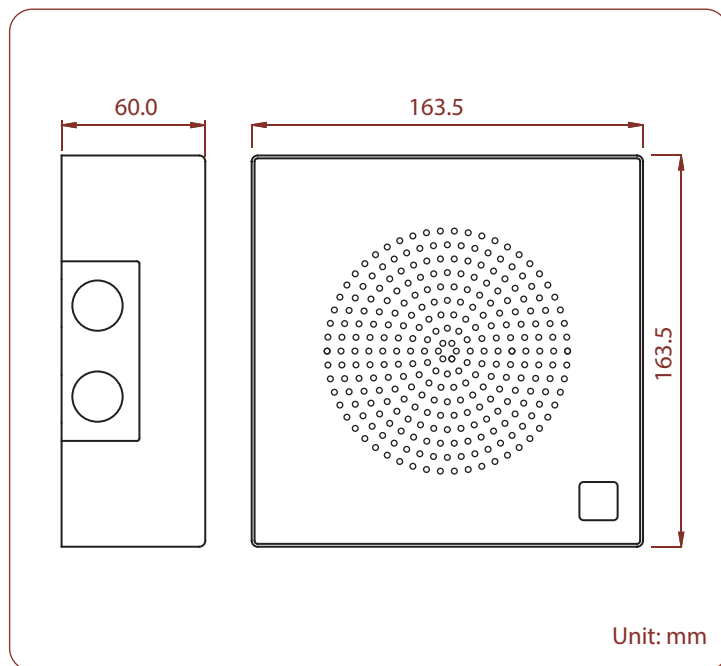

Unit: mm

- 100 Hours Life Tested
- CE Certified (EMC & LVD)
- IP Rated
- Rustproof
- UL94V0
- BS 5839 Part 8 & EN 60849
- EASE Data
- RoHS Compliance
- UV Stable
- Withstanding/Insulation Tested

Multi purpose wall cabinet loudspeaker, designed to be vandal-proof as well as compliant with voice alarm standards world-wide. Ideal for environments such as schools, public buildings, car parks, offices etc

- **Compliant with British Standard BS 5839 part 8 and EN 60849**
- **Two cable entries to enable loop in loop out installation**
- Twin ceramic termination blocks and fire resistant internal cabling
- 150°C thermal circuit isolating fuse
- Finished in white

Model No.	WSM-5061VA
Rated Power (rms)	6W
Impedance	1.67kΩ, 3.33kΩ, 6.67kΩ & 13.33kΩ
Power Taps @ 100V	6W, 3W, 1.5W & 0.75W
Power Taps @ 70V	3W, 1.5W, 0.75W & 0.375W
SPL (1W / 1m)	91dB
Max. SPL (Rated W / 1m)	98dB
Frequency Range (-10dB)	150 Hz ~ 18k Hz
Dispersion 1k Hz / 4k Hz	170° / 70°
Operating Temperature	-35°C ~ +70°C
Power Selection	Plug
Material	Housing: Steel
Colour / Finish	White
Dimensions	163.5 (6.44) X 163.5 (6.44) X 60.0 (2.36) mm. (in.)
Net Weight (ea)	2.00 kg (4.41 lb.)
Mounting	Screw