




WSM205006 Metallic Wall Loudspeaker

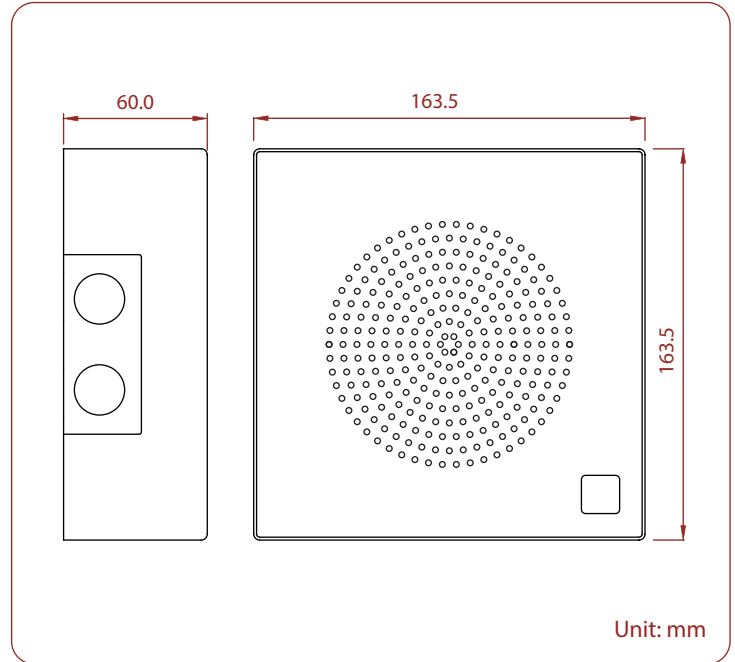

Unit: mm

- 100 Hours Life Tested
- CE Certified (EMC & LVD)
- IP Rated
- Rustproof
- UL94V0
- BS 5839 Part 8 & EN 60849
- EASE Data
- RoHS Compliance
- UV Stable
- Withstanding/Insulation Tested

- Compliant with EN 54-24 certified
- Compliant with British Standard BS 5839 part 8 and EN 60849
- Two cable entries to enable loop in loop out installation
- Vandal - proof
- Fitted with a 5" twin cone driver unit
- Designed to wide response for music & speech
- Finished in white

| Model No. | WSM205006 |
|---------------------------------|---|
| Rated Power (rms) | 6W |
| Impedance | 1.67kΩ , 3.33kΩ , 6.67kΩ & 13.33kΩ |
| Power Taps @ 100V | 6W, 3W, 1.5W & 0.75W |
| Power Taps @ 70V | 3W, 1.5W, 0.75W & 0.375W |
| Sensitivity (1W / 4m) - EN54-24 | 90dB |
| Frequency Range (-10dB) | 190 Hz ~ 18kHz |
| Dispersion 1k Hz / 4k Hz | 175° / 65° |
| Operating Temperature | -35°C ~ +70°C |
| Operating Temperature - EN54-24 | -10°C ~ +55°C |
| Ingress Protection - EN54-24 | IP 21C |
| Power Selection | Plug |
| Material | Housing: Steel |
| Colour / Finish | white |
| Dimensions | 163.5 (6.44) X 163.5 (6.44) X 60.0 (2.36) mm. (in.) |
| Net Weight (ea) | 2.00 kg (4.41 lb.) |
| Mounting | Screw |