




WCL-5300 Waterproof Cabinet Loudspeaker

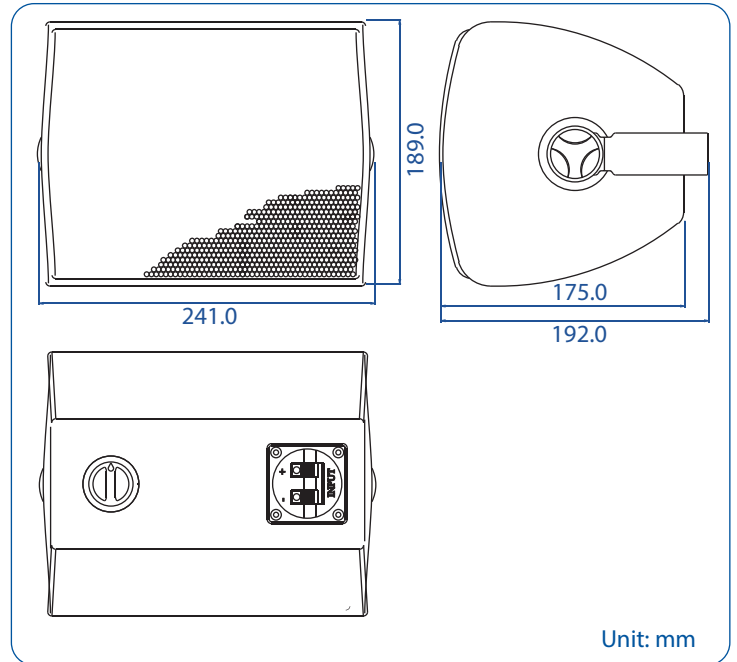

- 100 Hours Life Tested
- CE Certified (EMC & LVD)
- IP Rated
- Rustproof
- UL94V0
- BS 5839 Part 8
- EASE Data
- RoHS Compliance
- UV Stable
- Withstanding/Insulation Tested

- **Ingress protected to IEC 529 IP 55**
- **Rotary power selector**
- **Stainless steel exterior hardware**
- Very high quality 2-way speaker system with 5" polypropylene bass / mid cone & 10-ounce magnet + mylar laminate dome tweeter
- U mount stainless steel bracket included as a standard accessory
- Designed for the pro audio and commercial market
- Finished in black

Model No.	WCL-5300
Rated Power (rms)	30W
Impedance	167Ω, 333Ω, 667Ω, 1.30kΩ, 2.60kΩ & 8Ω
Power Taps @ 100V	30W, 15W, 7.5W, 3.75W & 8Ω
Power Taps @ 70V	30W, 15W, 7.5W, 3.75W, 1.9W & 8Ω
SPL (1W / 1m)	87dB
Max. SPL (Rated W / 1m)	102dB
Frequency Range (-10dB)	115 Hz ~ 25k Hz
Dispersion 1k Hz / 4k Hz	190° / 125°
Operating Temperature	-30°C ~ +60°C
Ingress Protection	IEC 529 IP 55
Power Selection	Selecting switch
Termination	Push terminal
Material	Housing: High impact polystyrene, Grille: Stainless steel
Colour / Finish	Black
Dimensions	241.0 (9.49) W X 189.0 (7.44) H X 175.0 (6.89) D mm. (in.)
Net Weight (ea)	2.80 kg (6.16 lb.)
Mounting	U Type stainless steel bracket