CAL-3150
Pro Audio Cabinet Loudspeaker

206.0
140.0
130.0
148.0

Unit: mm
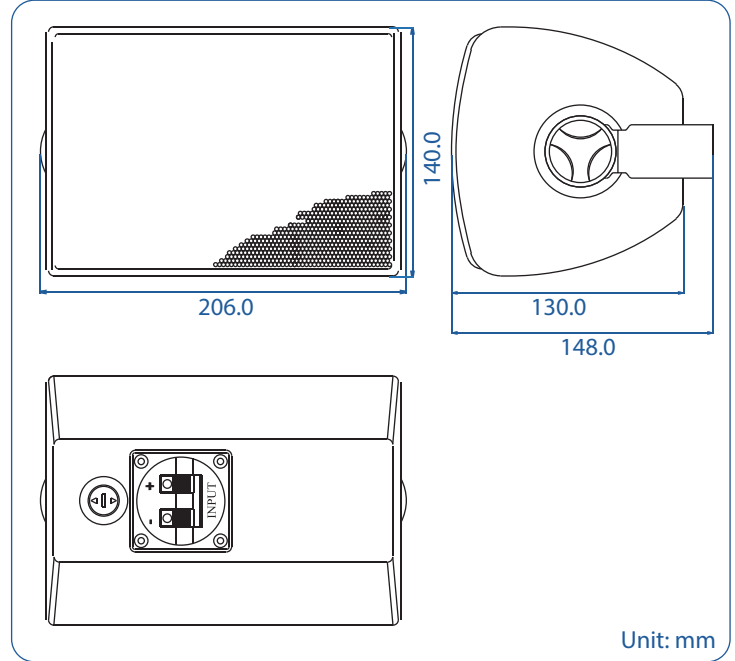
- ☑ 100 Hours Life Tested
- ☑ CE Certified (EMC & LVD)
- ☐ IP Rated
- ☐ Rustproof
- ☐ UL94V0
- ☐ BS 5839 Part 8
- ☑ EASE Data
- ☑ RoHS Compliance
- ☐ UV Stable
- ☑ Withstanding/Insulation Tested

➢ Very high quality 2-way speaker system with 3.5" polypropylene bass / mid cone & 8-ounce magnet + mylar laminate dome tweeter

➢ Rotary power selector

➢ Bass reflex design

➢ Designed for the pro audio and commercial market

➢ Designed utilizing CES Audio's anechoic test facilities with state of the art digital system analysis for accurate cabinet specification

➢ Attractive trapezoid cabinet design for improved directivity and versatile mounting

➢ Made from acoustically matched high impact polystyrene

➢ U mount bracket included as a standard accessory

➢ Finished in black

Model No.	CAL-3150W
Rated Power (rms)	15W
Impedance	667Ω, 1.33kΩ, 2.67kΩ, 5.33kΩ & 8Ω
Power Taps @ 100V	15W, 7.5W, 3.75W, 1.9W & 8Ω
Power Taps @ 70V	7.5W, 3.75W, 1.9W, 1W & 8Ω
SPL (1W / 1m)	88dB
Max. SPL (Rated W / 1m)	100dB
Frequency Range (-10dB)	85 Hz ~ 25k Hz
Dispersion 1k Hz / 4k Hz	200˚ / 130˚
Operating Temperature	-30˚C ~ +60˚C
Power Selection	Selecting switch
Termination	Push terminal
Material	Housing: High impact polystyrene, Grille: Steel
Colour / Finish	Black
Dimensions	206.0 (8.11) W X 140.0 (5.51) H X 130.0 (5.12) D mm. (in.)
Net Weight (ea)	1.87 kg (4.12 lb.)
Mounting	U Type steel bracket