




# SCP-6121

## IP Rated "Splashproof" Ceiling Loudspeaker

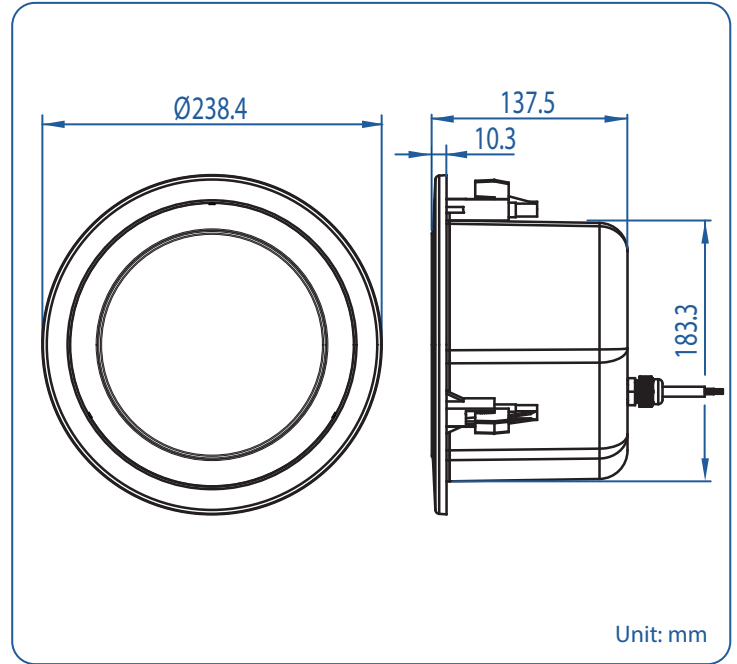

- 100 Hours Life Tested
- CE Certified (EMC & LVD)
- IP Rated
- Rustproof
- UL94V0
- BS 5839 Part 8
- EASE Data
- RoHS Compliance
- UV Stable
- Withstanding/Insulation Tested

- Ingress protected to IEC 529 IP 55
- Rotating mount tabs for easy installation
- Also suitable for food processing plants or applications where significant moisture is present such as bathroom or steam sauna rooms
- Suitable for non-shedding, "clean-room" environments
- Sealed ABS rear enclosure with glanded cable tail
- 6" full range polypropylene driver unit
- Finished in white

Model No.	SCP-6121
Rated Power (rms)	12W
Impedance	1.11kΩ, 1.67kΩ, 3.33kΩ, 10kΩ & 8Ω
Power Taps @ 100V	12W, 9W, 6W, 3W & 8Ω
Power Taps @ 70V	6W, 4.5W, 3W, 1.5W & 8Ω
SPL (1W / 1m)	91dB
Max. SPL (Rated W / 1m)	102dB
Frequency Range (-10dB)	130Hz ~ 20k Hz
Dispersion 1k Hz / 4k Hz	220° / 65°
Operating Temperature	-30°C ~ +60°C
Ingress Protection	IEC 529 IP 55
Power Selection	6-core cable
Material	Baffle: ABS, Grille: Aluminium, Enclosure: ABS
Colour / Finish	White
Dimensions	238.4 (9.39) Dia. X 137.5 (5.41) Length mm. (in.)
Cutout Size	210.0 (8.26) Dai. mm. (in.)
Net Weight (ea)	2.00 kg (4.44 lb.)
Mounting	Rotating mount tabs